

**COMMERCIAL RECYCLING
EQUIPMENT**



MOBILE COMPACTOR

MC32BL

THE BENEFITS

- ✓ Safe & easy to operate
- ✓ Saves space (Up to 6:1 compaction ratio)
- ✓ Cuts uplifts & transport costs
- ✓ Odour free, tidier & more efficient site
- ✓ It has a $\frac{3}{4}$ full & full indicator
- ✓ Can be loaded while running
- ✓ Reduces manual handling
- ✓ Liquid retentive



Visit www.pearce-group.co.uk
or call us on **0800 083 3333**

TECHNICAL DATA

MOBILE COMPACTOR MC32BL

Dimensional Data

Overall Width	2400mm
Overall Length	7300mm
Overall Height	2600mm
Machine Weight	5800kg
Skip Capacity	19.5m ²
Charge Box	1720 x 1150

Electrical Specification

Supply Voltage	415vac
Phase	3ph
Max Current	32A
IP Rating	IP55
Control Circuit	24vdc

Machine Specification

Compaction Force	33 tonnes
Motor	5.5kw
System Pressure	205 bar
Cycle Time	37 secs
75% & 100% Full Light	
SmartTec (status notifications)	


Optional Features

SolarPac (solar power)
Various Hopper Configurations
Extra Side Loading Door
Safety Barriers
Full Safety Cage



Having this Compactor means we don't have lots of bins dotted around the site anymore with rubbish lying around, really helping to keep our site nice & tidy. Being right in the middle of the public domain it's very important for us to keep smells & rubbish at a minimum which the Compactor does really well. It's also reduced the amount of vehicles having to come on site & helped to create savings. Our service is also twice a year, which is always on time, running nice & smoothly.

Colin Hendon
Gascoyne Cecil

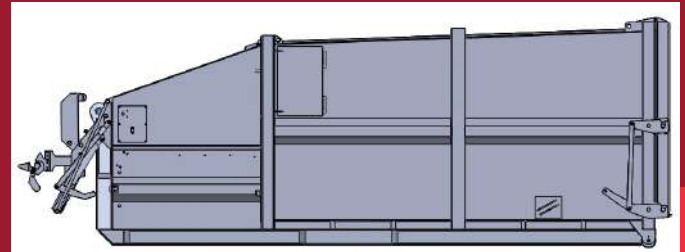

GET IN TOUCH



Pearce Group Head Office
Pearce House, Acrewood Way,
St Albans, Hertfordshire, AL4 0JY

Email: compaction@pearce-recycling.co.uk
Web: www.pearce-group.co.uk
Call: 0800 083 3333

